




❖玻璃纖維

			
型 號	K-HS 0.3×1P	K-HS 0.6×1P	J-HS 0.6×1P
規 格	素線級，單芯0.3	素線級，單芯0.6	素線級，單芯0.6
耐 溫	0~200℃	0~200℃	0~200℃
			
型 號	20-K-GG 0.81×1P	24-K-GG 0.51×1P	KEX-H 4/0.3×1P
規 格	素線級，單芯(美)	素線級，單芯(美)	補償級，4芯0.3
耐 溫	480~540℃	480~540℃	0~200℃
			
型 號	KEX-H 7/0.3×1P	KEX-H 4/0.6×1P	KEX-H 7/0.6×1P
規 格	補償級，7芯0.3	補償級，4芯0.6	補償級，7芯0.6
耐 溫	0~200℃	0~200℃	0~200℃
			
型 號	REX-H 7/0.3×1P	REX-H 4/0.6×1P	REX-H 7/0.6×1P
規 格	補償級，7芯0.3	補償級，4芯0.6	補償級，7芯0.6
耐 溫	0~200℃	0~200℃	0~200℃
			
型 號	J-HS 7/0.3×1P	J-HS 4/0.6×1P	J-HS 7/0.6×1P
規 格	素線級，7芯0.3	素線級，4芯0.6	素線級，7芯0.6
耐 溫	0~200℃	0~200℃	0~200℃

❖ 訂購型號參考表

型號 (TYPE)

素線級 Thermocouple Grade

K Type: K

J Type: J

N Type: N

T Type: T

E Type: E

補償級 Extension Grade

K Type: KEX

S Type: SEX

R Type: REX

N Type: NEX

B Type: BEX

使用區分 (Application)

一般用 (低溫) Low Temperature: G

耐熱用 (高溫) High Temperature: H

允差 (Tolerances)

精密級 Special: S

普通級 Standard: (空白)

屏蔽層 (Braided Shielding)

不銹鋼線編織 Stainless Braided (outside): S0S

鍍錫銅線外編織 Tinning Braided (outside): 0S

鍍錫銅線內編織 Tinning Braided (inside): IS

芯線數 (Number Of Conductors)

單芯: (空白)

4芯: 4

7芯: 7

線徑 (Diameter Of Conductors)

0.3mm: 0.3

0.6mm: 0.6

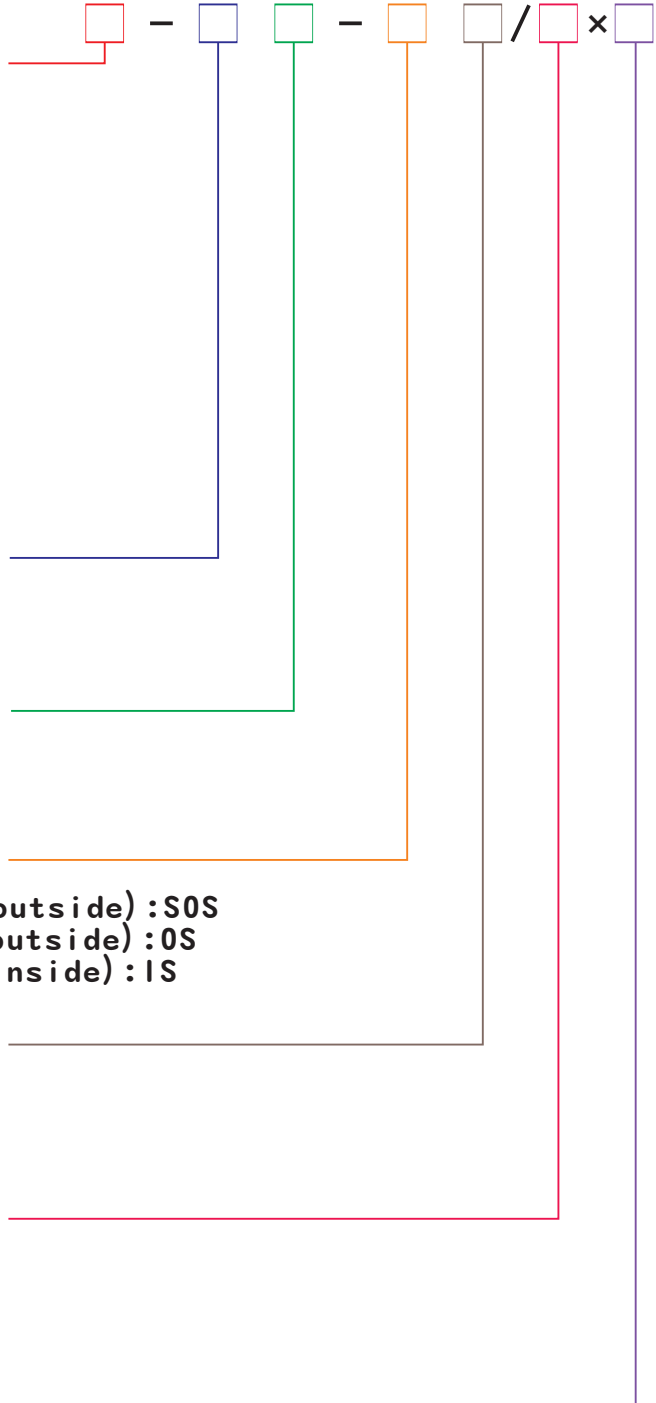
其他: _____

對數 (Number Of Pairs)














1對: 1P

2對: 2P

其他: _____

OW- - - / × 

❖PVC

			
型 號	K-GS 0.6×1P	K-GS 4/0.3×1P	KEX-G 4/0.3×1P
規 格	素線級，單芯0.6	素線級，4芯0.3	補償級，4芯0.3
耐 溫	0~105℃	0~105℃	0~105℃
			
型 號	KEX-G 7/0.3×1P	KEX-G 4/0.6×1P	KEX-G 7/0.6×1P
規 格	補償級，7芯0.3	補償級，4芯0.6	補償級，7芯0.6
耐 溫	0~105℃	0~105℃	0~105℃
			
型 號	TC-CA-G 4/0.3×1P	J-GS 7/0.3×1P	J-GS 4/0.6×1P
規 格	素線級，4芯0.3	素線級，7芯0.3	素線級，4芯0.6
耐 溫	0~105℃	0~105℃	0~105℃
			
型 號	J-GS 7/0.6×1P	REX-G 4/0.6×1P	T-GS 7/0.3×1P
規 格	素線級，7芯0.6	補償級，4芯0.6	素線級，7芯0.3
耐 溫	0~105℃	0~105℃	0~105℃
			
型 號	KEX-G-IS 7/0.3×1P	KEX-G-IS 4/0.6×1P	J-GS-IS 4/0.6×1P
規 格	補償級，7芯0.3 金屬網內隔離	補償級，4芯0.6 金屬網內隔離	素線級，4芯0.6 金屬網內隔離
耐 溫	0~105℃	0~105℃	0~105℃
			
型 號	J-GS-IS 7/0.6×1P	REX-G-IS 4/0.6×1P	E-GS-IS 4/0.6×1P
規 格	素線級，7芯0.6 金屬網內隔離	補償級，4芯0.6 金屬網內隔離	素線級，4芯0.6 金屬網內隔離
耐 溫	0~105℃	0~105℃	0~105℃

❖ 訂購型號參考表

型號 (TYPE)

素線級 Thermocouple Grade

K Type: K

J Type: J

N Type: N

T Type: T

E Type: E

補償級 Extension Grade

K Type: KEX

S Type: SEX

R Type: REX

N Type: NEX

B Type: BEX

使用區分 (Application)

一般用 (低溫) Low Temperature: G

耐熱用 (高溫) High Temperature: H

允差 (Tolerances)

精密級 Special: S

普通級 Standard: (空白)

屏蔽層 (Braided Shielding)

不銹鋼線編織 Stainless Braided (outside): S0S

鍍錫銅線外編織 Tinning Braided (outside): 0S

鍍錫銅線內編織 Tinning Braided (inside): IS

芯線數 (Number Of Conductors)

單芯: (空白)

4芯: 4

7芯: 7

線徑 (Diameter Of Conductors)

0.3mm: 0.3

0.6mm: 0.6

其他: _____

對數 (Number Of Pairs)





1對: 1P

2對: 2P

其他: _____

OW-

❖金屬網線

			
型 號	K-HS-SOS 0.6×1P	K-HS-OS 0.6×1P	J-H-SOS 0.6×1P
規 格	素線級，單芯0.6	素線級，單芯0.6	素線級，單芯0.6
耐 溫	0~200℃	0~200℃	0~200℃
			
型 號	J-HS-OS 0.6×1P	K-HS-SOS 4/0.3×1P	K-HS-OS 4/0.3×1P
規 格	素線級，單芯0.6	素線級，4芯0.3	素線級，4芯0.3
耐 溫	0~200℃	0~200℃	0~200℃
			
型 號	J-HS-SOS 4/0.3×1P		
規 格	素線級，4芯0.3		
耐 溫	0~200℃		
			
型 號	KEX-H-SOS 4/0.6×1P	KEX-H-SOS 7/0.6×1P	KEX-H-SOS 7/0.3×1P
規 格	補償級，4芯0.6 金屬網外隔離	補償級，7芯0.6 金屬網外隔離	補償級，7芯0.3 金屬網外隔離
耐 溫	0~200℃	0~200℃	0~200℃
			
型 號	KEX-G-SOS 4/0.6×1P	KEX-G-SOS 7/0.6×1P	J-HS-SOS 7/0.3×1P
規 格	補償級，4芯0.6 金屬網外隔離	補償級，7芯0.6 金屬網外隔離	素線級，7芯0.3 金屬網外隔離
耐 溫	0~105℃	0~105℃	0~105℃
			
型 號	J-HS-SOS 7/0.6×1P	REX-H-SOS 4/0.6×1P	REX-H-SOS 7/0.6×1P
規 格	素線級，7芯0.6 金屬網外隔離	補償級，4芯0.6 金屬網外隔離	補償級，7芯0.6 金屬網外隔離
耐 溫	0~105℃	0~200℃	0~200℃

❖ 訂購型號參考表

型號 (TYPE)

素線級 Thermocouple Grade

K Type: K

J Type: J

N Type: N

T Type: T

E Type: E

補償級 Extension Grade

K Type: KEX

S Type: SEX

R Type: REX

N Type: NEX

B Type: BEX

使用區分 (Application)

一般用 (低溫) Low Temperature: G

耐熱用 (高溫) High Temperature: H

允差 (Tolerances)

精密級 Special: S

普通級 Standard: (空白)

屏蔽層 (Braided Shielding)

不銹鋼線編織 Stainless Braided (outside): S0S

鍍錫銅線外編織 Tinning Braided (outside): 0S

鍍錫銅線內編織 Tinning Braided (inside): IS

芯線數 (Number Of Conductors)

單芯: (空白)

4芯: 4

7芯: 7

線徑 (Diameter Of Conductors)

0.3mm: 0.3

0.6mm: 0.6

其他: _____

對數 (Number Of Pairs)

1對: 1P

2對: 2P

其他: _____

OW-

❖ Teflon

		
型 號	K-TYPE Teflon 1/0.32×1P	K-TYPE Teflon 1/0.65×1P
規 格	單芯0.32	單芯0.65
耐 溫	0~200℃	0~200℃
		
型 號	J-TYPE Teflon 1/0.32×1P	T-TYPE Teflon 1/0.32×1P
規 格	單芯0.32	單芯0.32
耐 溫	0~200℃	0~200℃
		
型 號	K-TYPE Teflon 7/0.32×1P	K-TYPE Teflon 19/0.12×1P
規 格	7芯0.32	19芯0.12
耐 溫	0~200℃	0~200℃
		
型 號	Teflon RTD 20AWG×3C	Teflon RTD 24AWG×3C
規 格	20 AWG	24 AWG
耐 溫	0~200℃	0~200℃
		
型 號	Teflon RTD 24AWG×3C	Teflon RTD 24 AWG×6C
規 格	24 AWG，內包覆鋁箔	24AWG，內包覆隔離線
耐 溫	0~200℃	0~200℃